



Utral Heat Condensing Unit

Outdoor Model: KU36UXO



Indoor Model: KU24UXI



Model	Indoor Unit		KU24UXI
	Outdoor Unit		KU36UXO
Capacity	Cooling Capacity	Btu/h	24000
	Heating Capacity	Btu/h	25000
Power Input	Cooling	kW	1.92
	Heating	kW	2.04
SEER 2/ HSPF2	—		18.00/10.00
Indoor Unit			KU24UXI
Fan	Drive	—	Direct
	Motor Output	kW	0.37×1
	Air Flow	m ³ /h (CFM)	1292 (760)
	Rated Ext. Static Pressure	Pa (InWg)	125 (0.50)
	Ext. Static Pressure Range	Pa (InWg)	0~250 (0-1.0)
Sound Pressure Level(H/M/L)	dB(A)		50
Air Filter	—		Metal
Drain Piping	mm (inch)		Φ25.4×1.2 (Φ1×0.05)
Outline Dimensions (W×D×H)	mm (inch)		460×540×1105 (18-1/8×21-1/4×43-1/2)
Net Weight	kg (lb)		61.5 (135.6)
Outdoor Unit			KU36UXO
Power Supply	—		208/230V-1Ph-60Hz
Heat Exchange	—		Inner Groove Copper Tube-Aluminum Fin
Compressor	Type	—	Inverter Rotary
Refrigerant	Control	—	Electronic Expansion Valve
	Charge	kg (oz)	2.5 (88.2)
Outline Dimensions (W×H×D)	mm (inch)		990×370×960 (39×14-9/16×37-13/16)
Net Weight	kg (lb)		85.0 (187.4)
Piping Connections	Liquid	Inch	3/8"
	Gas	Inch	3/4"
	Max. Length	m (ft)	50 (164.0)
	Max. Height	m (ft)	30 (98.4)



Job Name:


Schedule Reference:

Date:

Specification are subject to change without notice.




Outline and Physical Dimensions of KU36UXO.

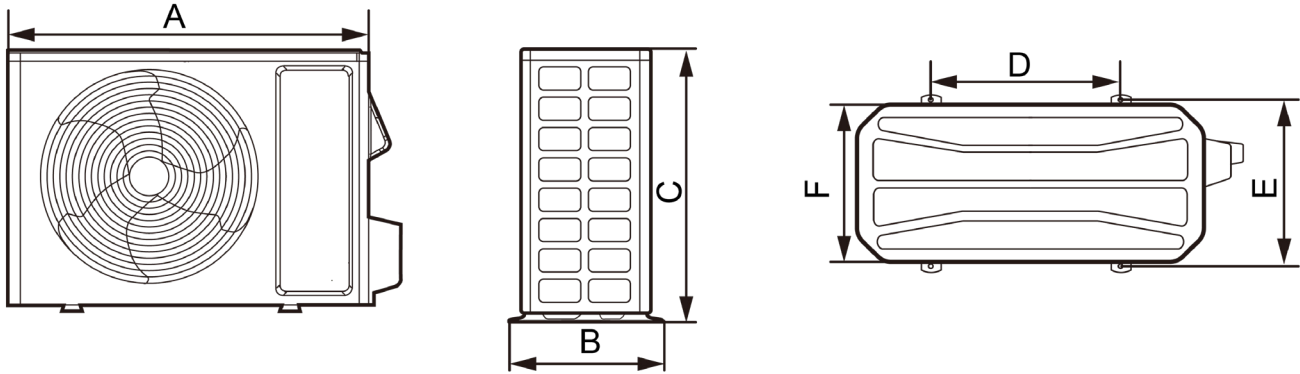

Unit: inch(mm)

Model \ Item	A	B	C	D	E	F
KU36UXO	39 (990)	16-13/16 (427)	37-13/16 (960)	29-3/4 (755)	15-9/16 (396)	14-9/16 (370)

Outline and Physical Dimensions of KU24UXI.

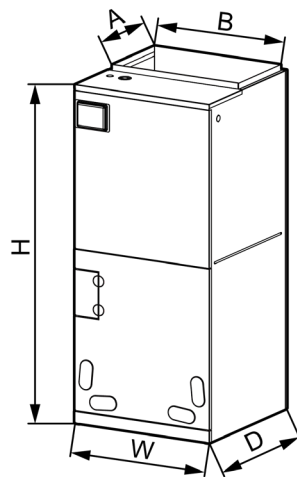

Unit: inch(mm)

Model	Dimension				
	W	D	H	A	B
KU24UXI	18-1/8 (460)	21-1/4 (540)	43-1/2 (1105)	11-5/8 (295)	16-3/4 (426)



GREE ELECTRIC APPLIANCES, INC. OF ZHUHAI

Add: Room 608, No.108 Huitong Third Road, Hengqin New Area, Zhuhai, Guangdong, China 519031
 Tel: (+86-756) 8522218 Fax: (+86-756)8669426 E-mail: gree@gree.com.cn <https://global.gree.com>