



DC INVERTER HEAT PUMP CONDENSING UNIT

Outdoor Model: KU36UX20



Indoor Model: KU36UX21



Model	Indoor Unit		KU36UX21
	Outdoor Unit		KU36UX20
Capacity	Cooling Capacity	Btu/h	34000
	Heating Capacity	Btu/h	34000
Power Input	Cooling	kW	2.85
	Heating	kW	2.90
SEER 2/ HSPF2	—		19.00/8.50
Indoor Unit			KU36UX21
Power Supply			—
Fan	Drive	—	Direct
	Motor Output	kW	0.37×1
	Air Flow	m ³ /h (CFM)	1950 (1150)
	Rated Ext. Static Pressure	Pa (InWg)	125 (0.50)
	Ext. Static Pressure Range	Pa (InWg)	0~250 (0-1.0)
Sound Pressure Level(H/M/L)	dB(A)	51	
Air Filter	—		Metal
Drain Piping	mm (inch)	Φ25.4×1.2 (Φ1×0.05)	
Outline Dimensions (W×D×H)	mm (inch)	540×540×1224 (21-1/4×21-1/4×48-3/16)	
Net Weight	kg (lb)	74.0 (163.1)	
Outdoor Unit			KU36UX20
Power Supply			—
Heat Exchange			—
Compressor	Type	—	Rotary
	Power Input	W	2910
Refrigerant	Control	—	Electronic Expansion Valve
	Charge	kg (oz)	2.8 (98.8)
Outline Dimensions (W×H×D)	mm (inch)	920×370×746 (36-1/4×14-9/16×29-3/8)	
Net Weight	kg (lb)	56.5 (124.56)	
Piping Connections	Liquid	Inch	Φ3/8
	Gas	Inch	Φ3/4
	Max. Length	m (ft)	50 (164.0)
	Max. Height	m (ft)	30 (98.4)



Job Name:


Schedule Reference:

Date:

Specification are subject to change without notice.




Outline and Physical Dimensions of KU36UX2O.

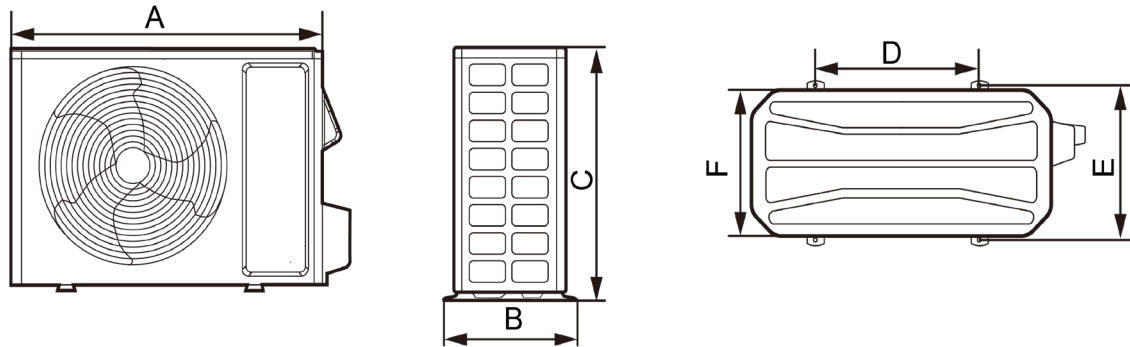

Unit: inch (mm)

Model \ Item	A	B	C	D	E	F
KU36UX2O	36-1/4 (920)	16-13/16 (427)	29-3/8 (746)	24 (610)	15-9/16 (396)	14-9/16 (370)

Outline and Physical Dimensions of KU36UX2I.

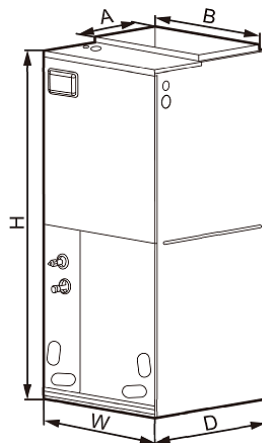

Unit: inch (mm)

Model	Dimension				
	W	D	H	A	B
KU36UX2I	21-1/4 (540)	21-1/4 (540)	48-3/16 (1224)	11-5/8 (295)	20 (508)



GREE ELECTRIC APPLIANCES, INC. OF ZHUHAI

Add: Room 608, No.108 Huitong Third Road, Hengqin New Area, Zhuhai, Guangdong, China 519031
 Tel: (+86-756) 8522218 Fax: (+86-756)8669426 E-mail: gree@gree.com.cn <https://global.gree.com>