

208~230V 1-Way Cassette


Model:GMV-ND09TD/NhA-T(U)



Specifications	Unit	Parameter
Model	—	GMV-ND09TD/NhA-T(U)
Performance		
Rated Cooling Capacity	kBtu/h	9.5
Rated Heating Capacity	kBtu/h	10.5
Sound Pressure Level	dB(A)	28/33/36
Electrical Data		
Power Supply	Voltage,Phase, Hertz	208/230,1,60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	0.3
Fan		
Type x Quantity	—	Cross-flow×1
Air Flow Volume	CFM	265/294/353
Fan Motor Running Current	A	0.2
Fan Motor Power Output	W	30
Refrigerant Piping		
Connection Pipe	Gas(mm/inch)	Φ9.52/Φ3/8
	Liquid(mm/inch)	Φ6.35/Φ1/4
Connection method	—	Flare Connection
Refrigerant	—	R32
Dimension/Weight		
Dimensions (H×W×D)	mm/inch	178×987×385 (7×38-7/8×15-3/16)
Net Weight	kg/lbs	19/42
Other		
Safety Certification	—	ETL

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Outline and Physical Dimensions of GMV-ND09TD/NhA-T(U)

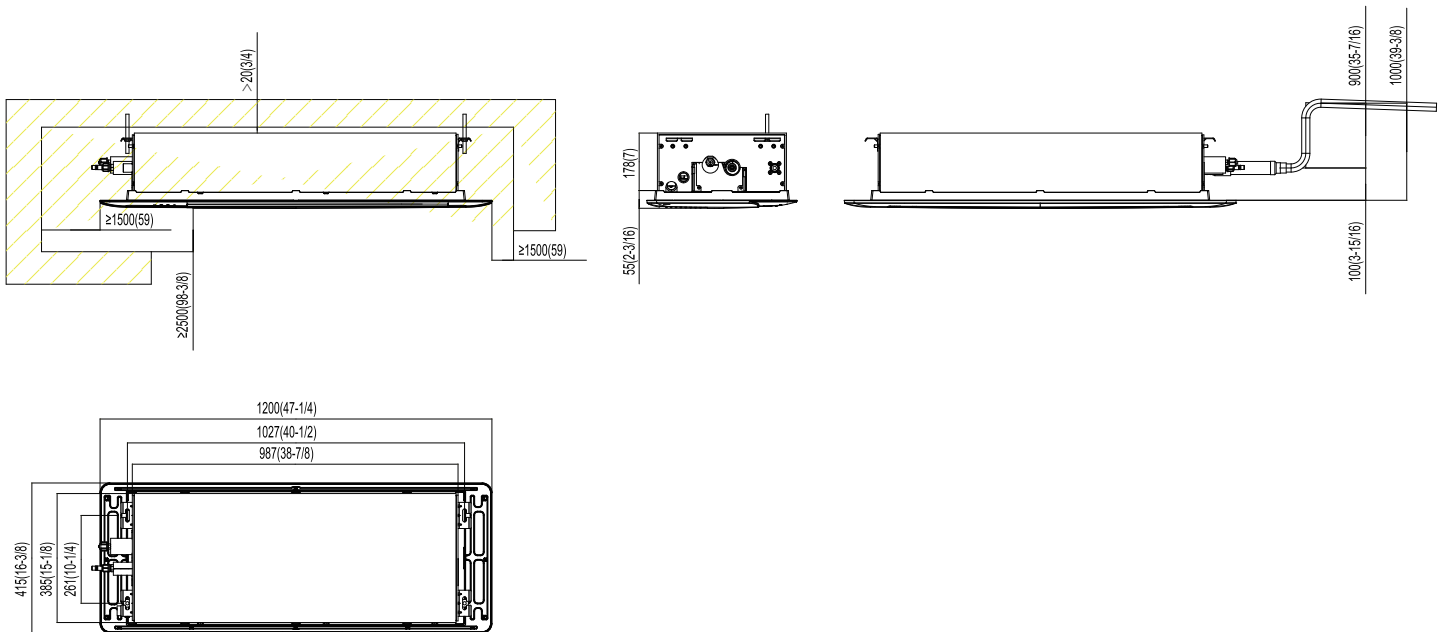

Unit:mm(in.)

